

Secure-A-Door Installation Instructions



PJB
SECURITY
PRODUCTS

by



SAS
SECURE YOUR WORLD

To assemble

The lock is installed by bolting it to the front or rear of the door/shutter, with a flush-fitting base locking socket that requires setting flush into concrete. The recommended installation involves creating a hole of at least 150mm deep and 120mm wide for the socket.

Installation instructions:

Preparation: Ensure the garage door is in the closed position.


Marking Fixing Points: Position the top red lock plate on the front/rear of the door and mark the locations for the fixing holes, and the position for the ground hole.

Attaching the Lock: Align the red lock plate with the base locking socket and secure it using the provided M10 screws, nuts, washers, and backing plate.

Hole in Ground: Dig to create a hole in the ground at least 150mm deep and 120mm wide at the marked location for the base locking socket.

Installing the Base Locking Socket: Insert the base locking socket into the hole created, ensuring it is flush with the door surface. Fill in around the base socket with a concrete/cement mix and allow to set hard, making sure it totally aligns with the red lock plate fitted to the door/shutter.

Final Checks: Ensure the silver lock is securely attached through the red locking plate and locked to the base locking socket.

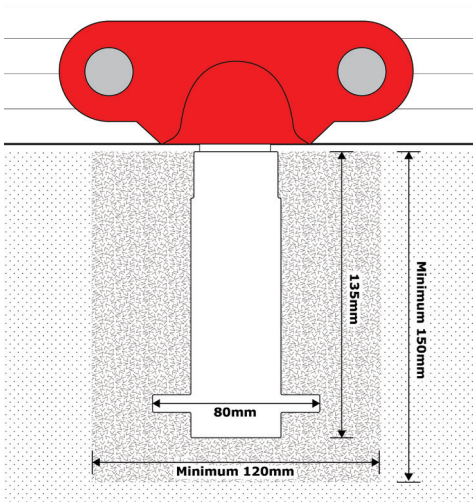

Encase the ground socket in a
Concrete/Cement mix
Minimum of 150mm deep x 120mm wide

About SAS

For over 38 years, SAS has been dedicated to designing and manufacturing reliable security solutions to protect your most valuable assets. Our robust products are rigorously tested and we are proud to say are trusted by owners, insurers, and industry experts alike. We offer a full range of security solutions, including **wheel clamps, hitch locks, garage locks, and other universal security products.**

Visit the SAS website to explore our full range of security products and SECURE YOUR WORLD TODAY!

Hitch Locks

Lock Hitched - Easy to secure caravan to vehicle when stationary.

Lock Unhitched - Quickly secure caravan when parking uncoupled from vehicle.



Wheel Clamps

Stop unauthorised movement of your Caravan, Motorhome, Trailer or Vehicle by securing the wheel.



Security Posts

Heavy Duty removable security posts. Increase security with optional tow ball bracket to secure caravan/trailer to post.



Chains & Padlocks

Extensive range of chains and padlocks to restrain your Caravan.



Ground Anchors

Simply create an anchor point to secure your chained Caravan to deter theft.



SAS Security Products Ltd

+44 1444 675889

sales@sasproducts.com

www.sasproducts.com



Oct25