


Supaclamp Duo Wheelclamp Range Instructions



Diagram

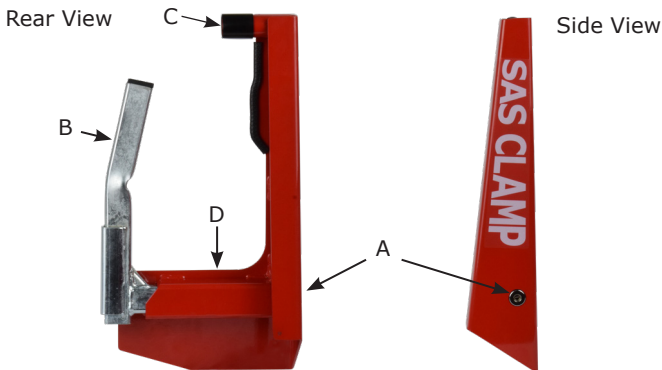

Specific models may vary.

Maintenance

On a regular basis for optimum performance:

- Clean and lubricate moving parts.
We recommend using SAS Mint General Protectant Spray to lubricate and protect the locks of all our products.
- Unwind the adjusting screw behind 'A' and remove rear arm 'B' - Grease the arm and re-assemble. We recommend using SAS Corrosion Block Waterproof Grease.

Spare Parts

Replacement Parts can be ordered at your local SAS dealer, or online at www.sasproducts.com



SAS Supaclamp Duo Range Fitting Instructions

1. Insert key and withdraw lock from "A"
2. Insert Allen key into bolt inside socket "A"
3. Turn the Allen key in an anticlockwise direction to open rear arm "B" to sufficient distance to enable the clap to be placed over the tyre
4. Locate the tube "C" over the wheel nut, move the clamp down until the tyre comes into contact with the lower frame marked "D". (It is not essential for the base of the clamp to be in contact with the ground).
5. Using the Allen key, AND HOLDING THE CLAMP IN POSITION turn the Allen key in a clockwise direction until the clamp is locked tight onto the tyre, then replace the lock.
6. Replace the lock by inserting lock into lock housing.

IMPORTANT NOTICE

For maximum security it is recommended to cut the front tube "C" down to allow the clamp to fit snugly to your particular wheel contour. This cuts possible leverage space to a minimum. For large rear hubs, the rear arm can be trimmed down to fit snugly onto the rear rim.

It is advisable to cover the lock with a tape when storing for long periods of time or over winter to prevent water ingress into the lock mechanism.

IT IS IMPERATIVE THAT THE CLAMP BE FITTED CORRECTLY FOR EFFECTIVE PROTECTION.

About SAS

For over 38 years, SAS has been dedicated to designing and manufacturing reliable security solutions to protect your most valuable assets. Our robust products are rigorously tested and we are proud to say are trusted by owners, insurers, and industry experts alike. We offer a full range of security solutions, including **wheel clamps, hitch locks, garage locks, and other universal security products.**

Visit the SAS website to explore our full range of security products and SECURE YOUR WORLD TODAY!

Hitch Locks

Lock Hitched - Easily secure your trailer or towed equipment to your vehicle when stationary.

Lock Unhitched - Quickly secure your trailer or equipment when parked and uncoupled from your vehicle.



Wheel Clamps

Stop unauthorised movement
— secure the wheel of your vehicle or equipment for added protection.



Security Posts

Heavy-duty removable security posts.
Enhance protection with an optional tow ball bracket to secure your vehicle or trailer to the post.



Chains & Padlocks

Wide range of heavy-duty chains and padlocks to keep your vehicle or equipment secure.



Ground Anchors

Easily create a secure anchor point to attach chains and deter theft.



SAS Security Products Ltd

+44 1444 675889

sales@sasproducts.com

www.sasproducts.com

